



cgc

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent of

U.S. Patent No. : 6,719,882 B2
Issued : Apr. 13, 2004
Title : **CELLULOSIC FIBER COMPOSITES USING PROTEIN
HYDROLYSATES AND METHODS OF MAKING SAME**
Docket No. : BAT 0033 PA/40078.35

Certificate of Corrections Branch
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

CERTIFICATE OF MAILING

I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450, on September 3, 2004.

R.A. Killworth 26397
Richard A. Killworth Reg. No. 26,397

Certificate
SEP 14 2004
of Correction

Sir:

REQUEST FOR CERTIFICATE OF CORRECTION FOR PTO MISTAKE
UNDER 35 U.S.C. 254 and 37 C.F.R. 1.322

In the matter of U.S. Patent No. 6,719,882 B2, it is respectfully requested that a Certificate of Correction be issued to cover the following errors which occurred in the printing of the patent.

TABLE 6

Summary Results of Internal Bond Strengths.

| No. | Resin | | Hot-pressing | | Panel Density PcF | Performance | |
|----------|--------------|-----------|--------------|-----------|----------------------|--------------|------------------|
| | Soy/PF Ratio | Content % | Temp., ° F. | Time, min | | Aver. IB psi | Std. Dev. IB psi |
| 0 | 0/100 | 4.5 | 370 | 4.5 | 48.0 | 63.3 | 16.3 |
| 1 | 25/75 | 3.5 | 340 | 3.5 | 45.9 | 14.0 | 14.1 |
| 2 | 25/75 | 4.5 | 370 | 4.5 | 48.8 | 48.7 | 18.9 |
| 3 | 25/75 | 5.5 | 400 | 5.5 | 49.0 | 93.5 | 11.0 |
| 4 | 35/65 | 3.5 | 340 | 5.5 | 47.8 | 54.3 | 6.8 |
| 5 | 35/65 | 4.5 | 400 | 3.5 | 49.0 | 36.8 | 12.0 |
| 6 | 35/65 | 5.5 | 340 | 4.5 | 48.2 | 48.3 | 10.9 |
| 7 | 45/55 | 3.5 | 400 | 4.5 | 48.0 | 40.5 | 11.9 |
| 8 | 45/55 | 4.5 | 340 | 5.5 | 48.6 | 41.7 | 13.4 |
| 9 | 45/55 | 5.5 | 370 | 3.5 | 46.9 | 12.6 | 11.7 |
| AVER. IB | K1 | 52.1 | 36.2 | 34.6 | 21.1 | | |
| | K2 | 46.4 | 42.4 | 38.5 | 45.8 | | |
| | K3 | 31.6 | 51.4 | 58.9 | 63.2 | | |
| Range | | 20.5 | 15.2 | 22.3 | 42.0 | | |
| *** | 3rd | 4th | 2nd | 1st | | | |

Table 6. Summary Results of Internal Bond Strengths.

| No. | Resin | | Hot-pressing | | Panel Density PcF | Performance | |
|----------|--------------|-----------|--------------|-----------|----------------------|--------------|------------------|
| | Soy/PF Ratio | Content % | Temp., ° F. | Time, min | | Aver. IB psi | Std. Dev. IB psi |
| 0 | 0/100 | 4.5 | 370 | 4.5 | 48.0 | 63.3 | 16.3 |
| 1 | 25/75 | 3.5 | 340 | 3.5 | 45.9 | 14.0 | 14.1 |
| 2 | 25/75 | 4.5 | 370 | 4.5 | 48.8 | 48.7 | 18.9 |
| 3 | 25/75 | 5.5 | 400 | 5.5 | 49.0 | 93.5 | 11.0 |
| 4 | 35/65 | 3.5 | 340 | 5.5 | 47.8 | 54.3 | 6.8 |
| 5 | 35/65 | 4.5 | 400 | 3.5 | 49.0 | 36.8 | 12.0 |
| 6 | 35/65 | 5.5 | 340 | 4.5 | 48.2 | 48.3 | 10.9 |
| 7 | 45/55 | 3.5 | 400 | 4.5 | 48.0 | 40.5 | 11.9 |
| 8 | 45/55 | 4.5 | 340 | 5.5 | 48.6 | 41.7 | 13.4 |
| 9 | 45/55 | 5.5 | 370 | 3.5 | 46.9 | 12.6 | 11.7 |
| AVER. IB | K1 | 52.1 | 36.2 | 34.6 | 21.1 | | |
| | K2 | 46.4 | 42.4 | 38.5 | 45.8 | | |
| | K3 | 31.6 | 51.4 | 58.9 | 63.2 | | |
| Range | | 20.5 | 15.2 | 22.3 | 42.0 | | |
| *** | 3rd | 4th | 2nd | 1st | | | |


"Table 6" should read

--Table 6--

Col. 17, Table 6, "Time, min" should read --Time, In--
Col. 17, Table 6, "Aver IB psi 42.0" should read --Time, In 42.0--
Col. 17, Table 6, "Aver IB psi 1st" should read --Time, In 1st--
Col. 19, Table 7, IB "11.36" should read --11.3--
Col. 19, Table 7, MOE "578500" should read --587500--
Col. 21, Claim 1, Line 55, "materiel" should read --material--


16 SEP 2004

Figure 4. Process Variables vs. Board Properties

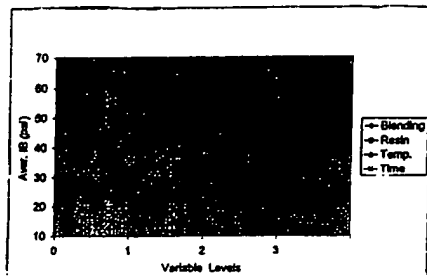

"Fig. 4" should read

Figure 4. Process Variables vs. Board Properties

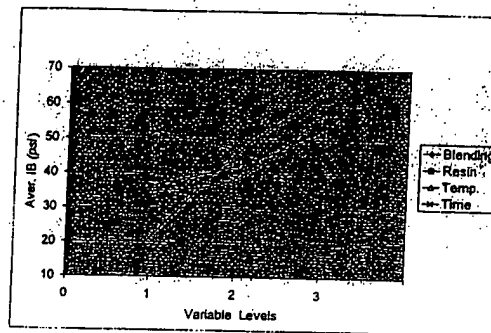

--Fig.4--

REMARKS

It is respectfully requested that a Certificate of Correction be issued for the above-identified patent. All of the above errors occurred during the printing of the patent and, therefore, no fee is due. Two (2) copies of the required Certificate of Correction Form PTO/SB/44 are enclosed.

Respectfully submitted,
DINSMORE & SHOHL LLP

By Richard A. Killworth

Richard A. Killworth
Registration No. 26,397

One Dayton Centre
One South Main St., Suite 1300
Dayton, Ohio 45402-2023
Telephone: (937) 449-6400
Facsimile: (937) 449-6405

RAK/ems
Encl.

UNITED STATES PATENT AND TRADEMARK OFFICE CERTIFICATE OF CORRECTION

PATENT NO. : 6,719,882 B2

DATED : Apr. 13, 2004

INVENTOR(S) : Vijayendran et al.

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

TABLE 6

Summary Results of Internal Bond Strengths.

| No. | Resin | | | Hot-pressing | | Panel | | Performance | |
|----------|--------------|-----------|------------|--------------|-------------|--------------|------------------|--------------|------------------|
| | Soy/PP Ratio | Content % | Temp. ° F. | Time, min | Density Pcf | Aver. IB psi | Std. Dev. IB psi | Aver. IB psi | Std. Dev. IB psi |
| 0 | 0/100 | 4.5 | 370 | 4.5 | 48.0 | 63.3 | 16.3 | | |
| 1 | 25/75 | 3.5 | 340 | 3.5 | 45.9 | 14.0 | 14.1 | | |
| 2 | 25/75 | 4.5 | 370 | 4.5 | 48.8 | 48.7 | 18.9 | | |
| 3 | 25/75 | 5.5 | 400 | 5.5 | 49.0 | 93.5 | 11.0 | | |
| 4 | 35/65 | 3.5 | 340 | 3.5 | 47.8 | 54.3 | 6.8 | | |
| 5 | 35/65 | 4.5 | 400 | 3.5 | 49.0 | 36.8 | 12.0 | | |
| 6 | 35/65 | 5.5 | 340 | 4.5 | 48.2 | 48.3 | 10.9 | | |
| 7 | 45/55 | 3.5 | 400 | 4.5 | 48.0 | 40.5 | 11.9 | | |
| 8 | 45/55 | 4.5 | 340 | 5.5 | 48.6 | 41.7 | 13.4 | | |
| 9 | 45/55 | 5.5 | 370 | 3.5 | 46.9 | 12.6 | 11.7 | | |
| AVER. IB | K1 | 52.1 | 36.2 | 34.6 | 21.1 | | | | |
| | K2 | 46.4 | 42.4 | 38.5 | 45.8 | | | | |
| | K3 | 31.6 | 51.4 | 56.9 | 63.2 | | | | |
| Range | 20.5 | 15.2 | 22.3 | | | 42.0 | | | |
| --- | 3rd | 4th | 2nd | | | 1st | | | |

Table 6. Summary Results of Internal Bond Strengths.

| No. | Soy/PP Ratio | Resin | | Hot-pressing | | Panel | | Performance | |
|----------|--------------|-----------|------------|--------------|-------------|--------------|------------------|--------------|------------------|
| | | Content % | Temp. ° F. | Time, min | Density Pcf | Aver. IB psi | Std. Dev. IB psi | Aver. IB psi | Std. Dev. IB psi |
| 0 | 0/100 | 4.5 | 370 | 4.5 | 48.0 | 63.3 | 16.3 | | |
| 1 | 25/75 | 3.5 | 340 | 3.5 | 45.9 | 14.0 | 14.1 | | |
| 2 | 25/75 | 4.5 | 370 | 4.5 | 48.8 | 48.7 | 18.9 | | |
| 3 | 25/75 | 5.5 | 400 | 5.5 | 49.0 | 93.5 | 11.0 | | |
| 4 | 35/65 | 3.5 | 340 | 3.5 | 47.8 | 54.3 | 6.8 | | |
| 5 | 35/65 | 4.5 | 400 | 3.5 | 49.0 | 36.8 | 12.0 | | |
| 6 | 35/65 | 5.5 | 340 | 4.5 | 48.2 | 48.3 | 10.9 | | |
| 7 | 45/55 | 3.5 | 400 | 4.5 | 48.0 | 40.5 | 11.9 | | |
| 8 | 45/55 | 4.5 | 340 | 5.5 | 48.6 | 41.7 | 13.4 | | |
| 9 | 45/55 | 5.5 | 370 | 3.5 | 46.9 | 12.6 | 11.7 | | |
| AVER. IB | K1 | 52.1 | 36.2 | 34.6 | 21.1 | | | | |
| | K2 | 46.4 | 42.4 | 38.5 | 45.8 | | | | |
| | K3 | 31.6 | 51.4 | 56.9 | 63.2 | | | | |
| Range | 20.5 | 15.2 | 22.3 | 42.0 | | | | | |
| --- | 3rd | 4th | 2nd | 1st | | | | | |

"Table 6" should read

--Table 6--

Col. 17, Table 6, "Time, min" should read --Time, In--

Col. 17, Table 6, "Aver IB psi 42.0" should read --Time, In 42.0--

Col. 17, Table 6, "Aver IB psi 1st" should read --Time, In 1st--

Col. 19, Table 7, IB "11.36" should read --11.3--

Col. 19, Table 7, MOE "578500" should read --587500--

Col. 21, Claim 1, Line 55, "materiel" should read --material--

MAILING ADDRESS OF SENDER:

Dinsmore & Shohl LLP

One Dayton Centre

One South Main Street, Suite 1300

Dayton, Ohio 45402-2023

This collection of information is required by 37 CFR 1.322, 1.323, and 1.324. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 1.0 hour to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Attention Certificate of Corrections Branch, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

PATENT NO. 6,719,882 B2

No. of additional copies



1

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

16 SEP 2004

UNITED STATES PATENT AND TRADEMARK OFFICE CERTIFICATE OF CORRECTION

PATENT NO. : 6,719,882 B2

DATED : Apr. 13, 2004

INVENTOR(S) : Vijayendran et al.

It is certified that error appears in the above-identified patent and that said Letters Patent
is hereby corrected as shown below:

MAILING ADDRESS OF SENDER:

Dinsmore & Shohl LLP

One Dayton Centre

One South Main Street, Suite 1300

Dayton, Ohio 45402-2023

PATENT NO. 6,719,882 B2

No. of additional copies




1

This collection of information is required by 37 CFR 1.322, 1.323, and 1.324. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 1.0 hour to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Attention Certificate of Corrections Branch, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.


16 SEP 2004

Figure 4. Process Variables vs. Board Properties

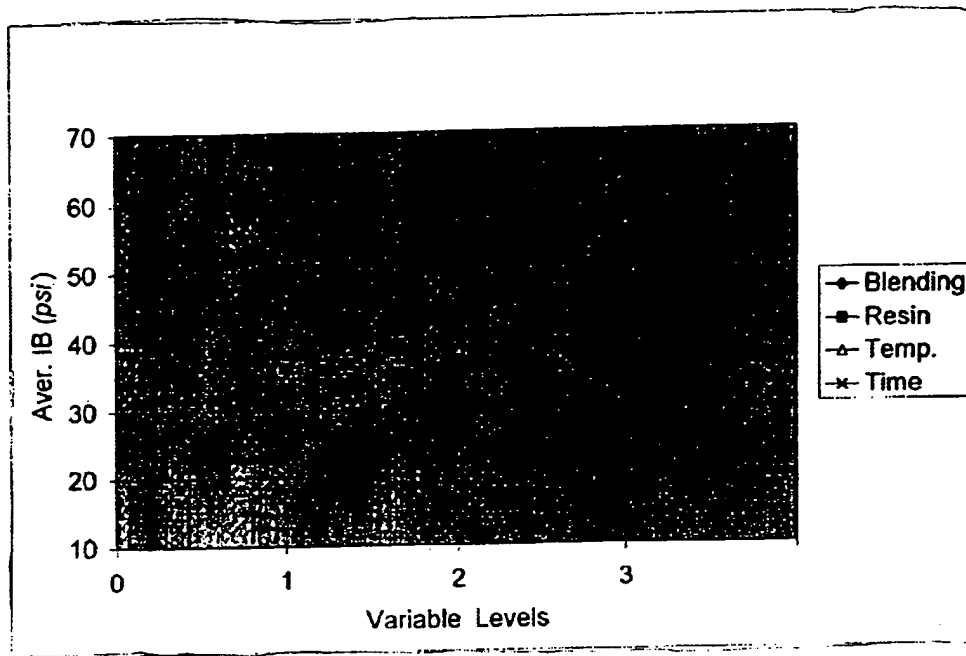

"Figure 4" should read

Figure 4. Process Variables vs. Board Properties

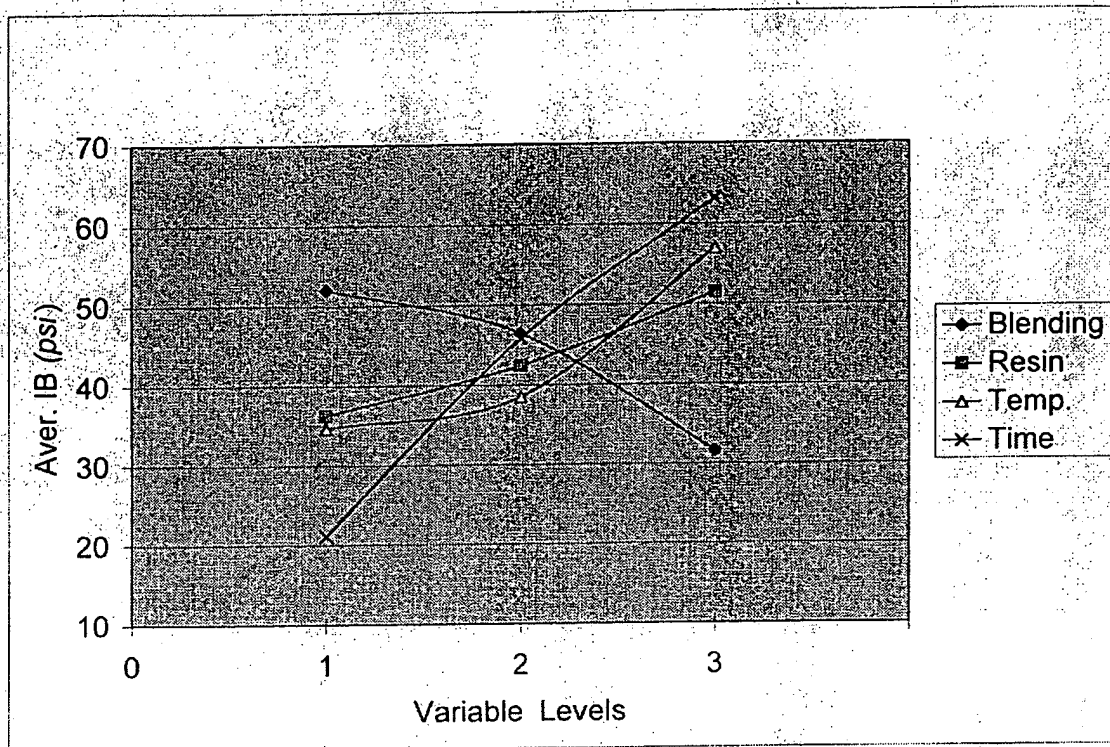

--Figure 4--